

Gas Fencing Stapler WZK/40-G644E



for fencing staples of
25 - 40 mm length



Li-Ion battery with LED charge
indicator



Properties:

- high capacity Li-Ion battery with LED charge indicator
- light and well balanced
- special nose for easy fastening of the fencing wire
- single shot actuation
- penetration depth adjustment
- for fencing staples of 25 - 40 mm length
- extremely powerful, even in frozen wood




Applications:

Easy fastening of all wire fencing, barbed wire, vineyard wire and cage wires onto wood

Included in delivery: Sturdy case, 2 Li-Ion batteries, charger, spare parts list, service instructions, exploded drawing, allen wrench, ear plugs



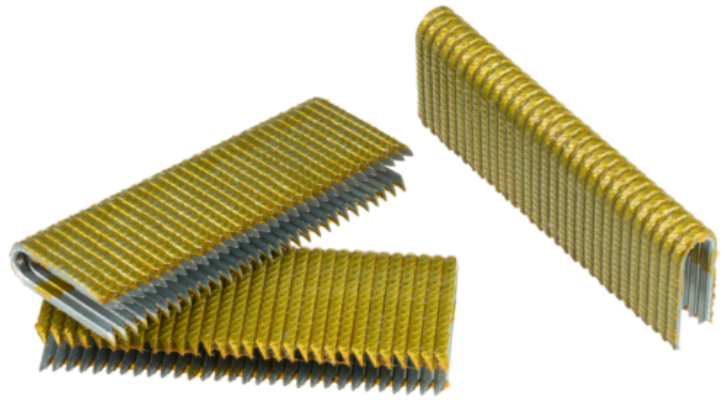


WZK/40-G644E

Technical data

Code	12100702
Dimensions in mm	L 373, W 108, H 356
Weight	3.93 kg
Operation mode	Duwl xwll
Safety system	Single shot actuation
Battery charging time and voltage	90 minutes - 7.2 Volt - 2500 mAh
Fastener type	Fencing staple
Diameter	2.75 x 3.3 mm, Width: 12.9 mm
Length	25 -40 mm
Magazine capacity	3 strips with 26 staples
Average number of shots per battery load	8000
Average number of shots per fuel cell	1.200
Emission sound pressure level at workstation	L pA, 1s = 102 dB
Single-shot emission sound pressure level	L pA, 1s = 100.2 dB
Vibration level as per ISO 8662-11 is	4.5 m/s ²

Subject to technical changes



WZK fencing staple

Diameter 2,75 x 3,3 mm
Width 12,9 mm
Length 25 -40 mm



Fuel cell (40g. 80 ml.)



The Behrens group is a member of the following associations:



KMR - The partner of craftsmen

Joh. Friedrich Behrens AG, Bogenstraße 43-45, 22926 Ahrensburg
Tel. +49 (0) 4102 78 - 444, Fax +49 (0) 4102 78 - 270
info@kmr-group.de, www.kmr-group.de

Follow KMR on



KMR UK & Ireland